













# MCU PROJECT BOARD - 2

AXM-0368 REV C



J1 SIGNALS	
1	RANGE +/-18V, 7 Yrms
2	MAX +/-20V, 14 Yrms
3	CURRENT RASD AT 500mA
4	RANGE +/-5V, 3.5 Yrms
5	DIGITAL I/O TTL COMPATIBLE

POWER LIMITS	
USB	+5V, 200mA
USB	+3.3V, 200mA
N/A	N/A
+	+5V, 500mA
+	+3.3V, 500mA
-	+/-15V, 50mA
-	+5V, 2A
+	+/-15V, 500mA
-	+/-12V, 500mA

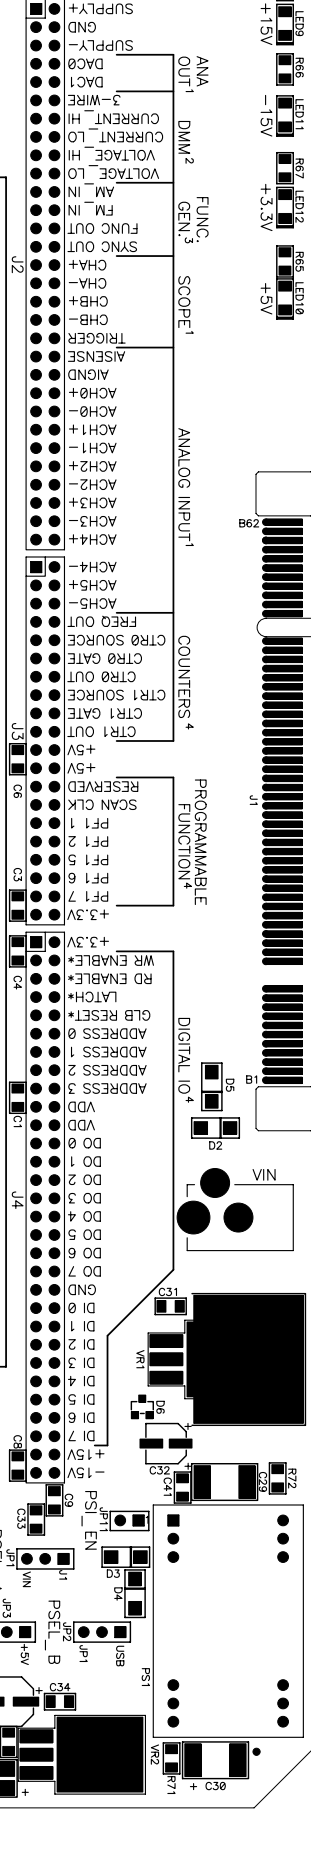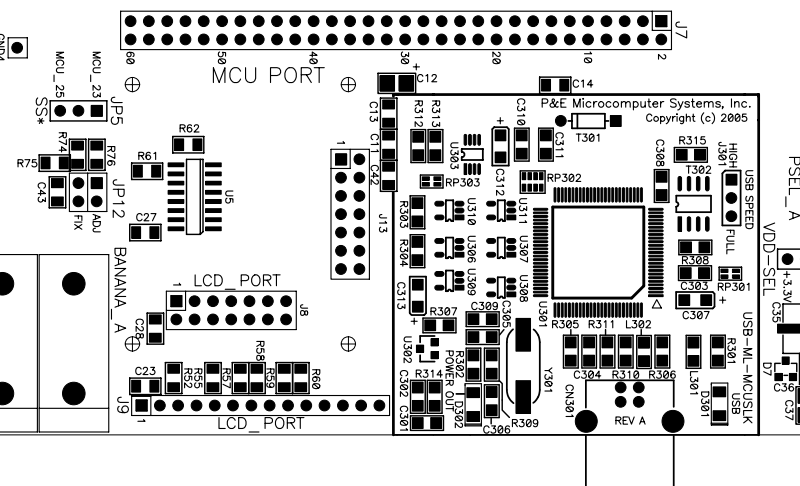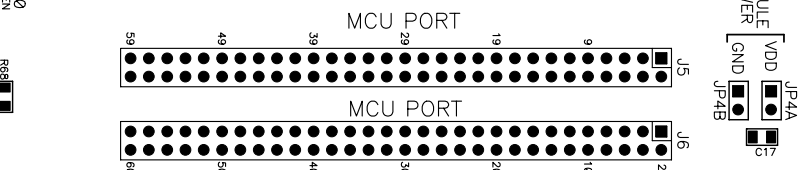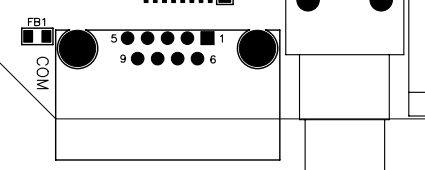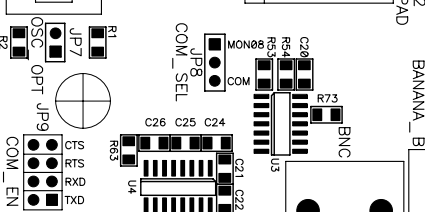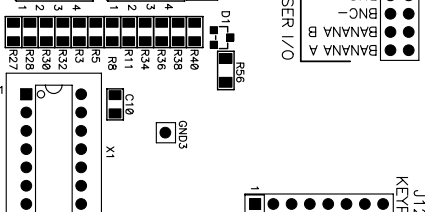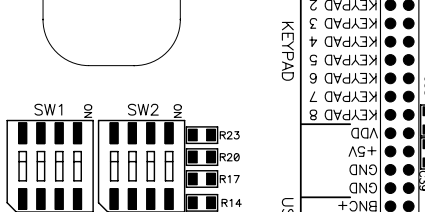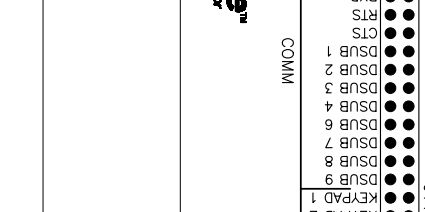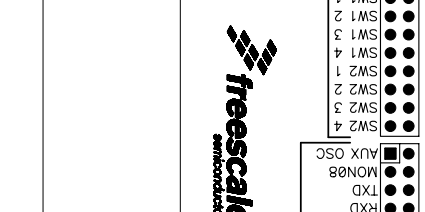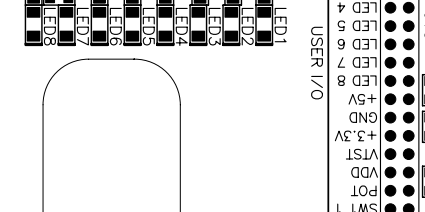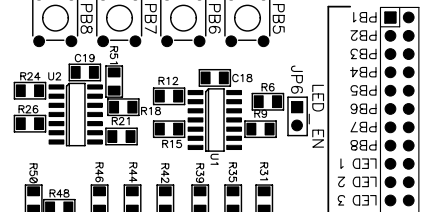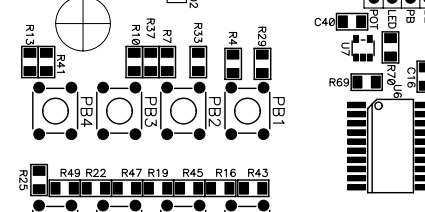

P&E Microcomputer Systems, Inc.  
Copyright (c) 2005