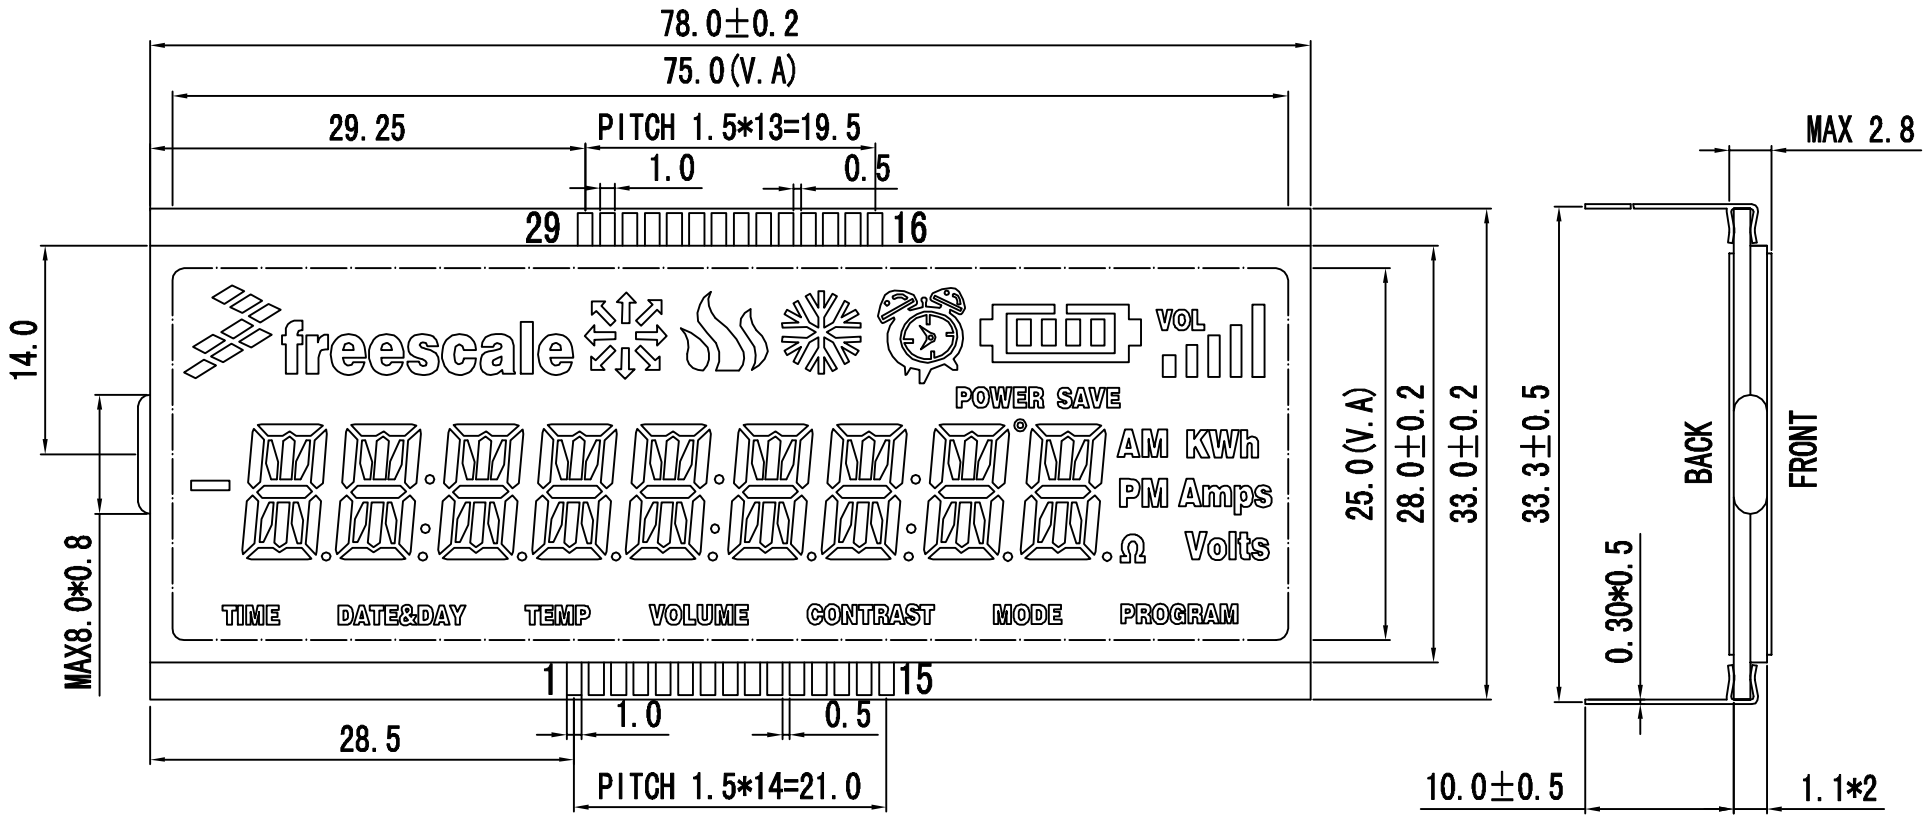

NOTES:

1. VIEWING ANGLE: 6:00 O'CLOCK
2. DISPLAY MODE:POSITIVE/REFLECTIVE/TN TYPE
3. DRIVING VOLTAGE: 5.0V,DUTY:1/8,BIAS:1/3,FREQUENCY:64Hz
4. OPERATING TEMP.:0° C TO 50° C
5. STORAGE TEMP.:-10° C TO 60° C
6. CONNECTOR:PIN TYPE

VER.	MODIFY CONTENTS	DATE	DESIGN
6			
5			
4			
3			
2			
1	MODIFY BIAS	071016	Y.L.F

S-Tek Displays Cleveland, Ohio 44146

PART NO. GD-4972AP

DESIGN BY L K 26/07-07

CHECKED BY

APP BY

TOLERANCES UNLESS OTHERWISE STATED
.X ±0.20
.XX ±0.10 ANGLES±1°
ALL DIMENSIONS IN MM
UNLESS OTHERWISE STATED
CUSTOMER:S-TEK

APPLICATION:
☐Instrument ☐Audio Equipments ☐Watch&Clock
☐Telephone ☐Automobile ☒Other
☐Home Appliances ☐Air-condition
SAMPLE: ☐Yes ☒No

COMPOSE TYPE:
☐MONO X-STEP: ~ # MM ~
☐ALONG Y-STEP: ~ # MM ~

SHEET 1 OF 2

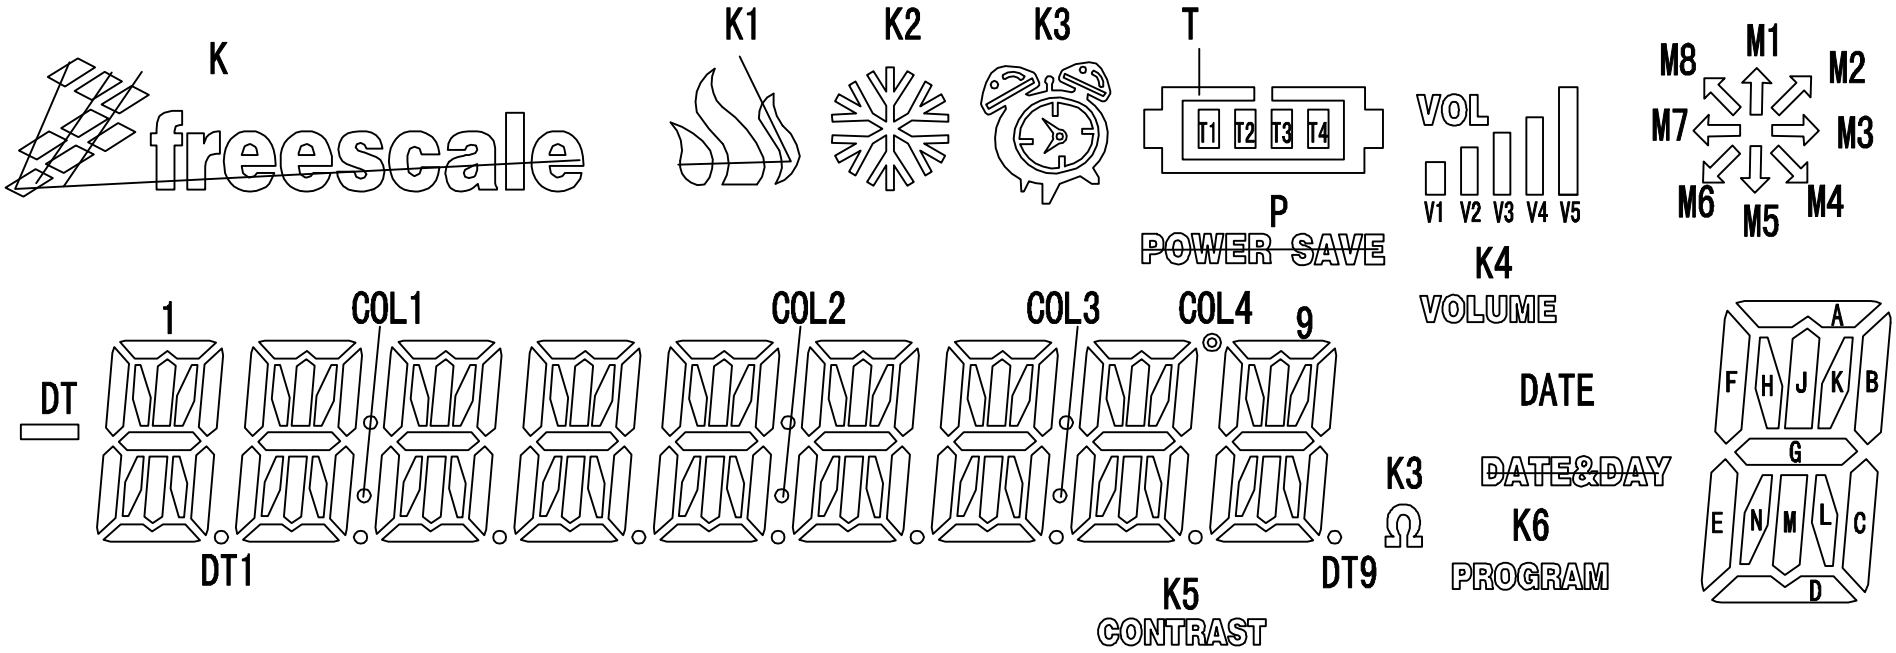

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
COM1	COM1								1J	2J	3J	4J	5J	6J	7J	8J	9J	V3	V2	9A	8A	7A	6A	5A	4A	3A	2A	1A	M5
COM2		COM2							1K	2K	3K	4K	5K	6K	7K	8K	9K	V4	V1	9H	8H	7H	6H	5H	4H	3H	2H	1H	M4
COM3			COM3						1B	2B	3B	4B	5B	6B	7B	8B	9B	V5	VOL	9F	8F	7F	6F	5F	4F	3F	2F	1F	M6
COM4				COM4					1C	2C	3C	4C	5C	6C	7C	8C	9C	AM	T	9G	8G	7G	6G	5G	4G	3G	2G	1G	M3
COM5					COM5				1L	2L	3L	4L	5L	6L	7L	8L	9L	KWh	T4	9E	8E	7E	6E	5E	4E	3E	2E	1E	M7
COM6						COM6			1M	2M	3M	4M	5M	6M	7M	8M	9M	PM	T3	9N	8N	7N	6N	5N	4N	3N	2N	1N	M2
COM7							COM7		1D	2D	3D	4D	5D	6D	7D	8D	9D	Amps	T2	DT8	DT7	DT6	DT5	DT4	DT3	DT2	DT1	DT	M1
COM8								COM8	TIME	DATE	TEMP	K4	K5	MODE	K6	K3	DT9	Volts	T1	COL4	COL3	P	COL2	K3	K2	COL1	K1	K	M8

VER.	MODIFY CONTENTS	DATE	DESIGN
6			
5			
4			
3			
2			
1	MODIFY BIAS	071016	Y.L.F

S-Tek Displays Cleveland, Ohio 44146

PART NO. GD-4972AP

DESIGN BY L K 26/07-07

CHECKED BY

APP BY

TOLERANCES UNLESS OTHERWISE STATED
.X ±0.20
.XX ±0.10 ANGLES±1°
ALL DIMENSIONS IN MM
UNLESS OTHERWISE STATED
CUSTOMER: S-TEK

APPLICATION:
☐ Instrument ☐ Audio Equipments ☐ Watch&Clock
☐ Telephone ☐ Automobile ■ Other
☐ Home Appliances ☐ Air-condition

SAMPLE: ☐ Yes ■ No

COMPOSE TYPE:
☐ MONO X-STEP: " # MM "
☐ ALONG Y-STEP: " # MM "

SHEET 2 OF 2