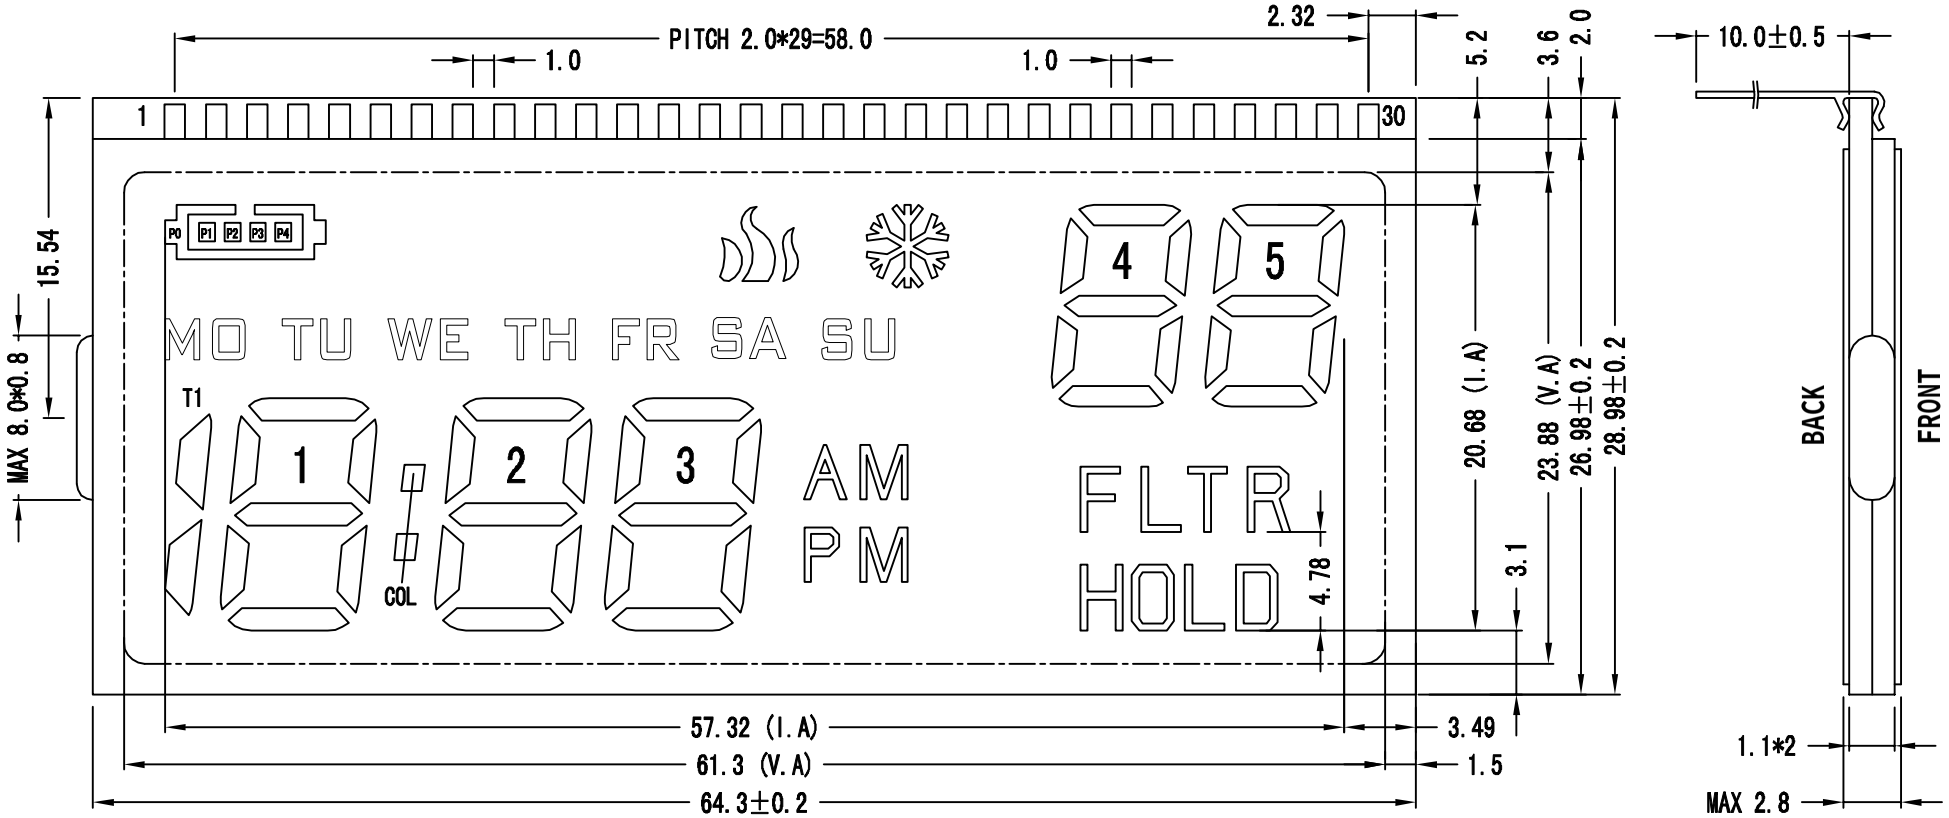

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
COM1	MO	P0	P3	P4	TU	1B	1C	1D	WE	TH	2B	2C	2D	FR			3B	3C
COM2	T1	P1	P2		1A	1F	1G	1E	COL	2A	2F	2G	2E	3A	SA	SU	3F	3G

PIN	19	20	21	22	23	24	25	26	27	28	29	30
COM1	3D	AM	FLTR	4D	4E	4F	4A	5E	5F	5A	COM1	
COM2	3E	PM	HOLD	5D	4C	4G	4B	5C	5G	5B		COM2





NOTES:
1. VIEWING ANGLE: 6:00 O'CLOCK
2. DISPLAY MODE: POSITIVE/REFLECTIVE/TN TYPE
3. DRIVING VOLTAGE: 2.7V, DUTY:1/2, BIAS:1/2
4. OPERATING TEMP.: 0° C TO 50° C
5. STORAGE TEMP.: -10° C TO 60° C
6. CONNECTOR: PIN TYPE

VER.	MODIFY CONTENTS	DATE	DESIGN
6			
5			
4			
3			
2	MODIFY LOGIC AND ICON	18/06-08	L.M.L
1	MODIFY LOGIC	28/05-08	R.Y.Z

S-Tek Displays *Cleveland, Ohio 44146*

PART NO. GD-5360P

DESIGN BY Q B 26/05-08

CHECKED BY

APP BY

TOLERANCES UNLESS OTHERWISE STATED
.X ±0.20
.XX ±0.10 ANGLES±1°
ALL DIMENSIONS IN MM
UNLESS OTHERWISE STATED

CUSTOMER: S-TEK

APPLICATION:
☐Instrument ☐Audio Equipments ☐Watch&Clock
☐Telephone ☐Automobile ■Other
☐Home Appliancess ☐Air-condition

SAMPLE: ☐Yes ■No

COMPOSE TYPE:
☐X-STEP: " # MM "
☐Y-STEP: " # MM "

SHEET 1 OF 1